




## 1.5" SNAP LOCK

Installation ease with impeccable results makes our NCM 450SL roof system a standout choice. The 1-1/2" Snap Lock profile and NCM 450SL Clip create a continuous interlocking system that installs quickly, reducing labor costs. The concealed fastener and clip application also allow thermal expansion and contraction movement to help keep the beautiful finish straight and true.

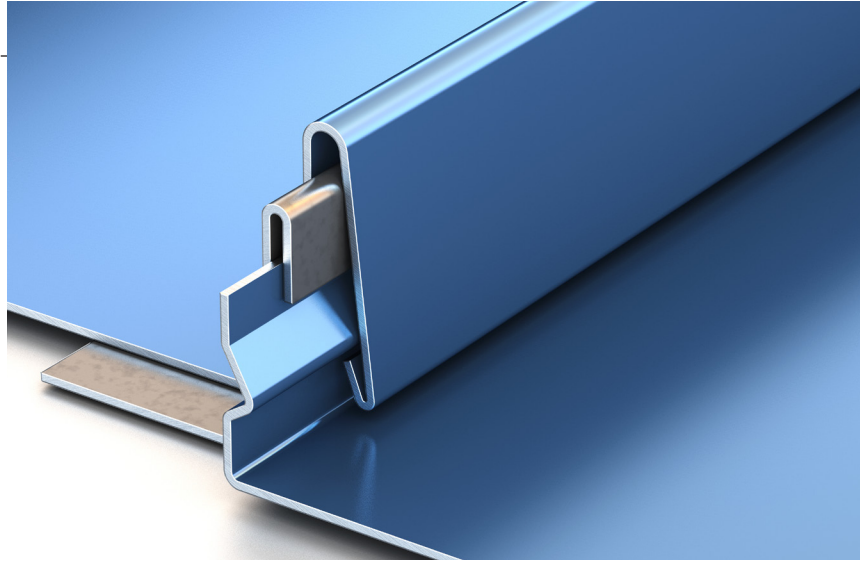

Ideal Application:

Commercial

Residential




# NC 450SL Profile

## Available widths:

Standard Widths: 16"

Non-Standard Widths: 12"-20"

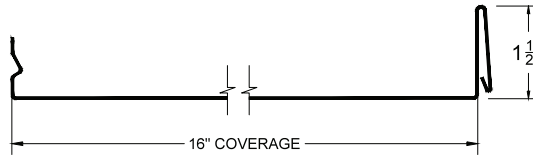

## Substrates available:



## Finishes and product warranty:

Available in a variety of coatings and colors by AkzoNobel. See the New Castle Metals color card for standard colors and paint specifications



Galvalume<sup>®</sup> Substrate:  
High-performance painted metal roofing product, carefully tensioned leveled for superior fatness.

**35** YEAR WARRANTY

35-Year Non Pro-rated  
PVDF Paint Warranty

Drexlume<sup>®</sup> Substrate:  
Mill finished Galvalume<sup>®</sup> with a two-sided, clear acrylic finish.

**25** YEAR WARRANTY

25-Year Non Pro-rated  
Drexlume Warranty  
(Acrylic Coated Galvalume)

## Production options:

Factory made or feild rolled to exact lengths  
Optional: striation, beads, pencil ribs

## Installation:

Can be installed over plywood decking and New Castle Metals MetShield<sup>®</sup> underlayment.



**MetShield**  
Underlayment

## Slope:

Minimum slope 3:12



Minimum Roof Pitch:  
3:12 – low roof pitch

## Testing:

In accordance with:



- UL 580 Wind Uplift (Class 90)
- UL 2218 Class 4 Hail Impact
- UL 263 Fire Certification
- UL 790 Class A Fire Rating
- UL Environmental – SRI Third-Party Verified

