




3-WAY CAP THRU WALL




3 WAY CAP/THRU-WALL
45° RECEIVER




CAP/THRU-WALL (SMOOTH)
45° RECEIVER




3 WAY CAP/THRU-WALL
90° RECEIVER



CAP/THRU-WALL (SMOOTH)
90° RECEIVER

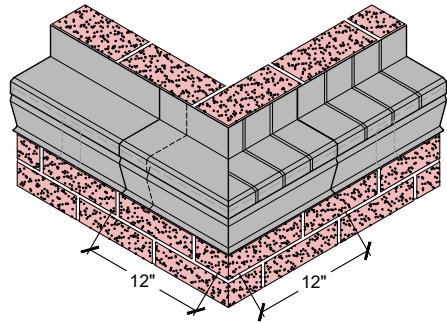

CORNER MITER

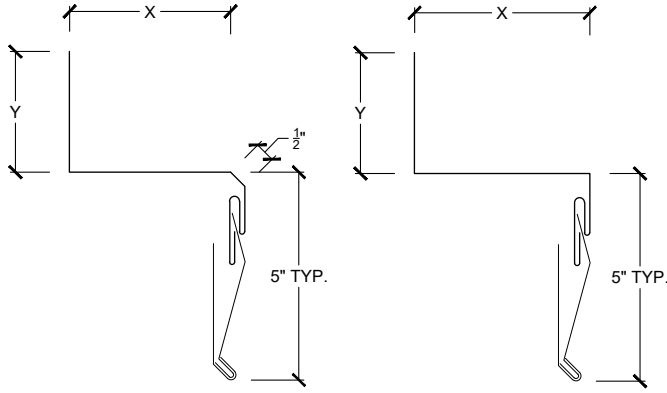

CAP/THRU-WALL
45° RECEIVER

CAP/THRU-WALL
90° RECEIVER

X = _____

X = _____

Y = _____

Y = _____

TOTAL LF RECEIVER = _____

TOTAL LF RECEIVER = _____

TOTAL LF INSERT = _____

TOTAL LF INSERT = _____

☐ 2" WIDE CLEATS (Optional)
AT 32" O.C.

☐ 2" WIDE CLEATS (Optional)
AT 32" O.C.

TYPICAL CORNER DETAIL & INSTALLATION FOR COPING FLASHING

SCALE: 3/4" = 1'-0"

PROJECT DETAILS

JOB NAME:

CUSTOMER:

DATE:

MATERIAL:

24GA GALVANIZED
.032 ALUMINUM
.040 ALUMINUM
.050 ALUMINUM
.063 ALUMINUM
OTHER

COLOR:

FINISH:

KYNAR
MILL FINISH
S.M.P.
ANODIZED

QUANTITY:

LINEAR FEET:

OUTSIDE MITER:

INSIDE MITER:

END CAP (LEFT):

END CAP (RIGHT):

OPTIONAL TRIM RING

NOTES:



METALSALES@NCMETAL.COM | 516.207.7708 |   