




3-WAY CAP THRU WALL




3 WAY CAP/THRU-WALL
45° RECEIVER




CAP/THRU-WALL (SMOOTH)
45° RECEIVER




3 WAY CAP/THRU-WALL
90° RECEIVER



CAP/THRU-WALL (SMOOTH)
90° RECEIVER

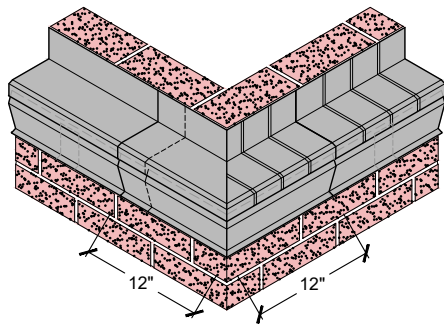

CORNER MITER

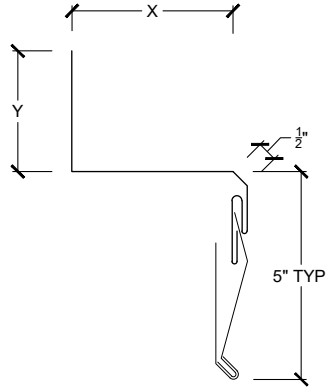

CAP/THRU-WALL
45° RECEIVER


X = _____

Y = _____

TOTAL LF RECEIVER = _____

TOTAL LF INSERT = _____

☐ 2" WIDE CLEATS (Optional)
AT 32" O.C.

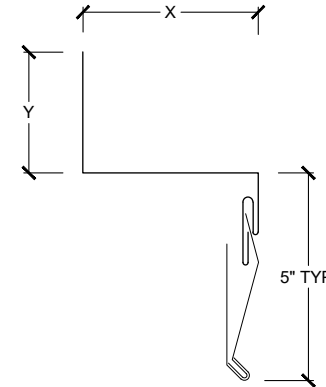

CAP/THRU-WALL
90° RECEIVER

X = _____

Y = _____

TOTAL LF RECEIVER = _____

TOTAL LF INSERT = _____

☐ 2" WIDE CLEATS (Optional)
AT 32" O.C.

PROJECT DETAILS

JOB NAME: _____

CUSTOMER: _____

DATE: _____

MATERIAL:

☐ 24GA Steel

☐ .032 Aluminum

☐ .040 Aluminum

☐ .050 Aluminum

☐ .063 Aluminum

☐ Other: _____

COLOR: _____

* Not all color and gauge combinations are available,
please reach out to your NCM representation to
confirm availability.

FINISH:

☐ Kynar

☐ Mill Finish

☐ SMP

☐ Anodized

LINEAR FEET: _____

OUTSIDE MITER: _____

INSIDE MITER: _____

END CAP (LEFT): _____

END CAP (RIGHT): _____

NOTES:

TYPICAL CORNER DETAIL & INSTALLATION FOR COPING FLASHING
SCALE: 3/4" = 1'-0"