


675S - 1.75" Snap Lock Panel

The New Castle Metal 675S panel showcases a fully integral snap-lock seam, promising superior performance and a quick, machine-free installation process. The squared top of the interlocking female rib provides dimensional appeal and a modern aesthetic to any project.

With varying coverages* from 12"-20" available, the 675S panel is suitable for any project from light residential, through to the most performance driven industrial projects.


Premium performance and aesthetics without compromise.

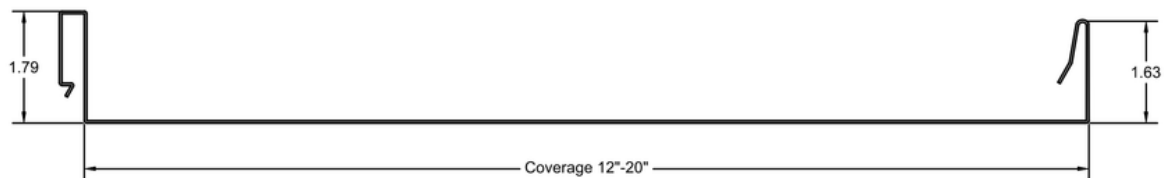

*14" and 18" pan widths are the optimal yield from standard coil sizes.

Benefits:

- Adjustable Panel width from 10" to 24"
- UL-Certified
- Weathertightness Warranty Approved
- Cut-to-length for your projects requirements
- Site Forming Available

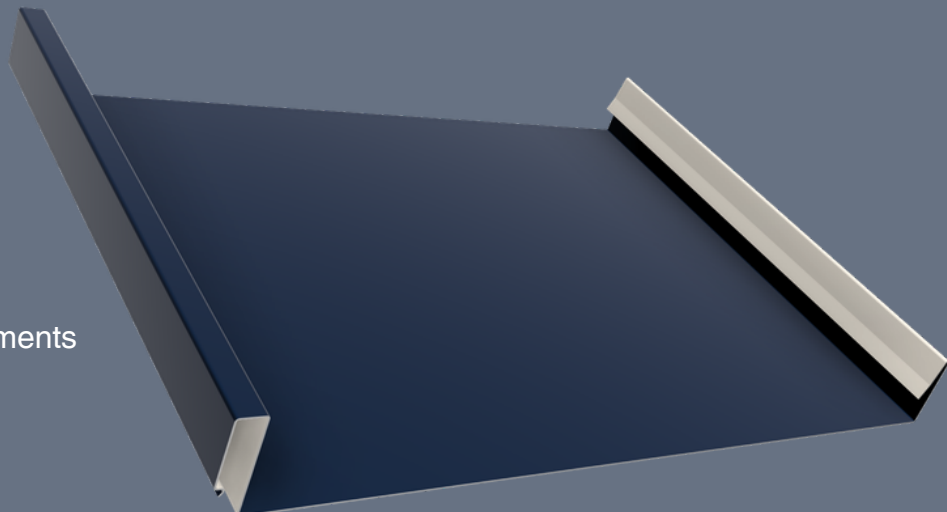

PRODUCT INFORMATION

Tested Standards:

- ASTM 1592 (TAS 125) - Uniform Static Air Pressure
- ASTM E-283 Air Filtration Leakage
- ASTM E-1646 Water Penetration
- ASTM E-1680 Air Leakage
- UL 580 Wind Uplift - Class 90
- UL 1987 Extended Phase Wind Uplift
- UL 263 Fire Certification
- UL 2219 Class 4 Hail Impact
- UL 790 Class A Fire Rating

Finishes and Product Warranty:

Material	Warranty Length
Kynar Coated Aluminum	35 year
Kynar Coated Galvalume	25 year
Galvalume+ AZ55	25 year

*specialty products on request.

Panel Specification:

Panel Name	675S
Standard Panel Width	14" or 18"
Available Panel Width	12" - 20"
Minimum Length	12"
Maximum Length	N/A
Weathertight Warranty Approved	Yes
Recommended Minimum Pitch	2:12
Site-Forming Available	Yes
Total Uplift Pressure	-262psf*
Aluminum Availability	.032"-.040"
Galvalume Availability	26ga-22ga

*design pressures require safety factor to be added

